
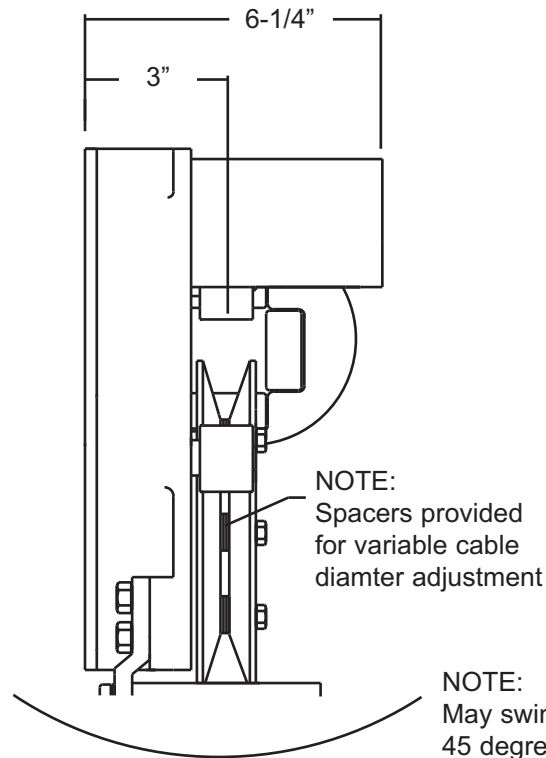



CM-7 RV-CABLEMASTER DIMENSIONS

SPECIFICATIONS:

Voltage:	12 VDC (24/32v DC available)
Amperage:	7-9 amps under load
Weight:	22 lbs.
Capacity:	adj. from 7/8" to 1-1/4" dia. cable - 50 amp 220v cable
Length of cable:	determined by available storage space

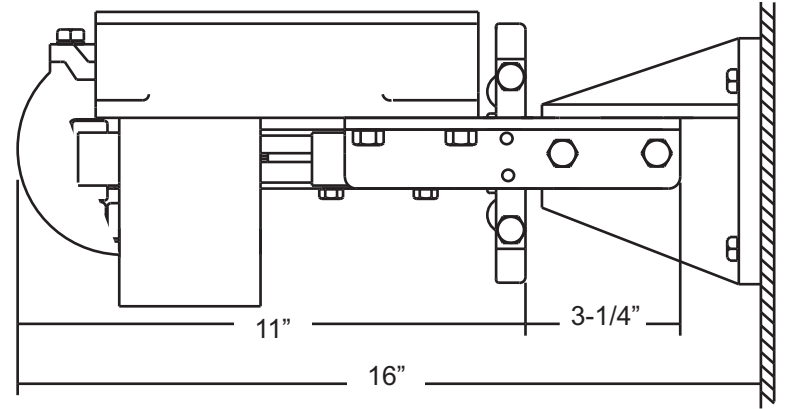


NOTE:
May swing up to 45 degrees

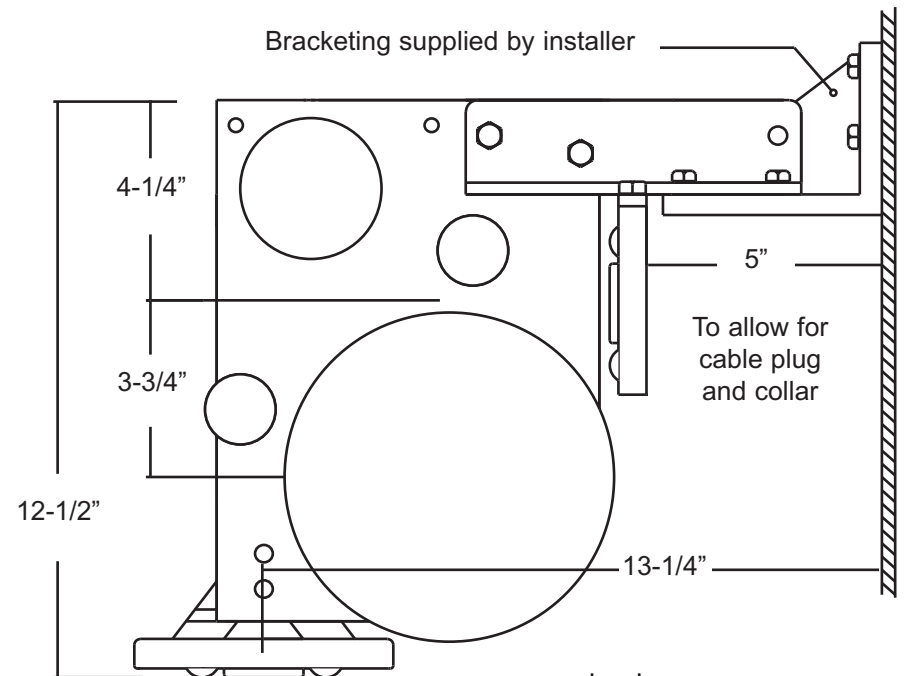


Minimum cable area required:
35' Soft cable (SOW) 14" x 14" x 16" high
35' Stiff cable (STW) 16" x 16" x 16" high

SAMPLE RV INSTALLATIONS



Remote Installation
(TOP VIEW)

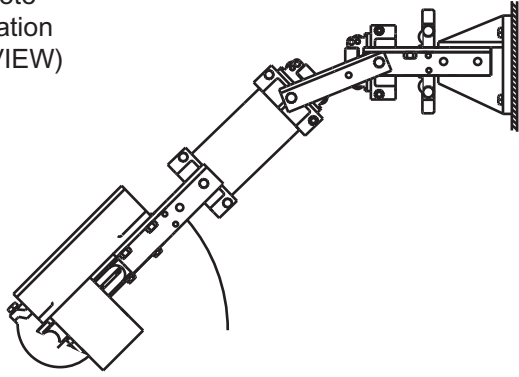

Unit
Swiveled
(REAR VIEW)

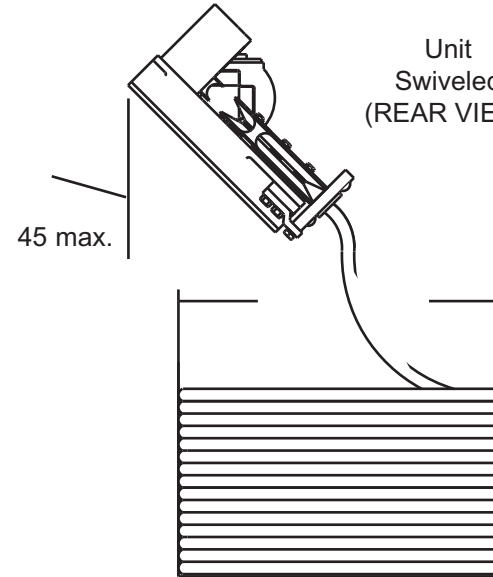

Standard
Installation
(SIDE VIEW)

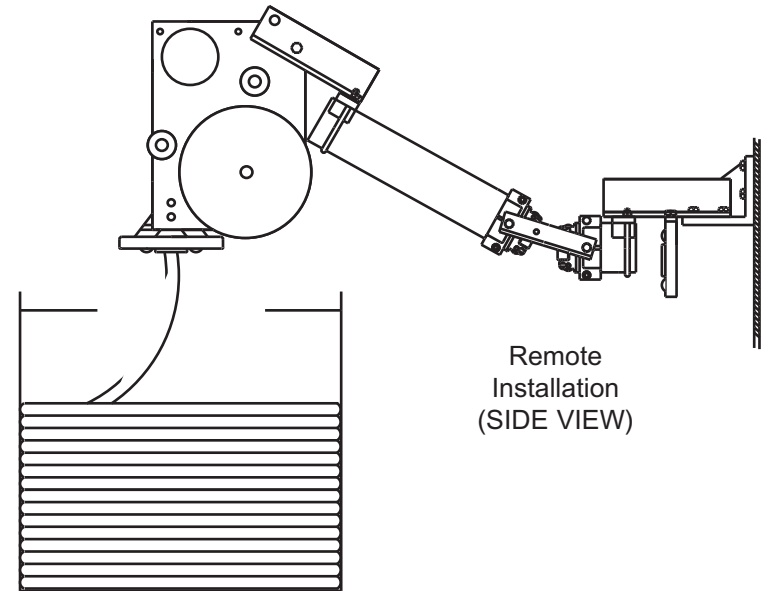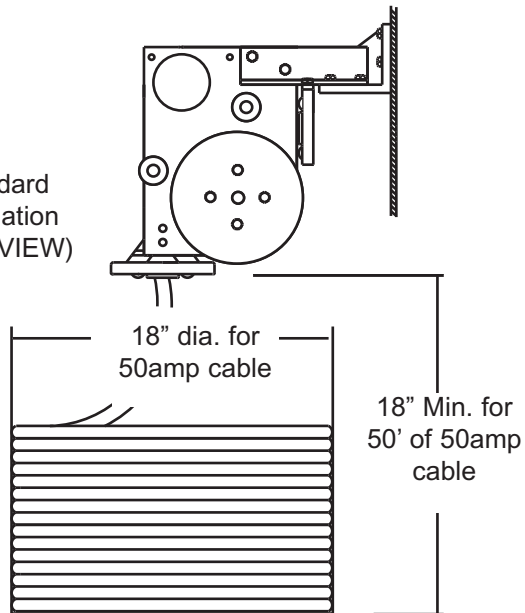

Remote
Installation
(SIDE VIEW)



GLENDINNING
MARINE PRODUCTS, INC.

740 Century Circle
Conway, SC 29526

P: 843-399-6146
F: 843-399-5005

www.glendinningprods.com
RVCM7 DIM-02/01