

CABLEMASTERTM Model CRM-30


- EASY TO USE Simply pull out the amount of shore power cable you need to make your connection. Push the button and the cable will retract and store on the reel.
- "ZERO EFFORT" PULL-OUT FORCE Our unique drive motor mechanism (patent pending) disengages itself when the cable is extended. No heavy pulling!



- COMPACT STORAGE Store 50feet of 30 amp shore power cable in the smallest possible area.
 - EASY TO INSTALL Our detachable mounting base makes it easy to mount the unit anywhere.
 - MARINE GRADE DESIGN —
 The Cablemaster™ product line is specifically designed for the marine environment built to last!
 - ► FULLY TESTED AND
 APPROVED UL, CSA, ABYC,
 CE, ISO 8846 (Ignition Protected)

"Extend . . . Retract . . . Relax!"

CABLEMASTER™ — MODEL CRM-30 SPECIFICATIONS

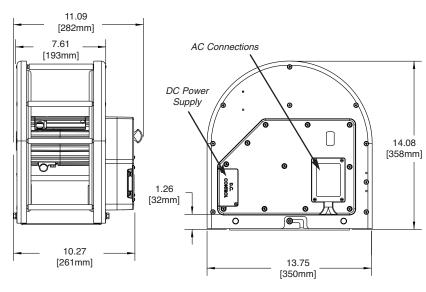

tested for ignition protection

meets all CE requirements

Part No.	Description	Cable Jacket Color	Includes 6 foot "pigtail"	Includes 30 amp breaker
CRM30-XX	Cablemaster™ — Model CRM-30 - incl. control switch (6 foot wire length)	White	No	No
CRM30Y-XX	Cablemaster™ — Model CRM-30 - incl. control switch (6 foot wire length)	Yellow	No	No
CRM30-XX-PT	Cablemaster [™] — Model CRM-30 - incl. control switch (6 foot wire length) & 6 foot 30amp boat wire	White	Yes	No
CRM30-XX-B	Cablemaster™ — Model CRM-30 - incl. control switch (6 foot wire length) and integrated 30 amp breaker	White	No	Yes
CRM30-XX-PTB	Cablemaster™ — Model CRM-30 - incl. control switch (6 foot wire length) & 6 foot 30amp boat wire / integrated 30 amo circuit breaker	White	Yes	Yes
CM30Y-XX-PTB	Cablemaster™ — Model CRM-30 - incl. control switch (6 foot wire length) & 6 foot 30amp boat wire / integrated 30 amp circuit breaker	Yellow	Yes	Yes

XX = 12 or 24 (specify voltage)

OPTIONAL FEATURES / ACCESSORIES:

- Integrated 30amp circuit breaker provides protection from damage in the event of overload or a short circuit. Conveniently located on the side of the unit with easy, visual indication that the breaker has been tripped.
- **High temperature shut off sensor** responds automatically when temperatures fall outside the safe, operating temperatures of the unit.
- Pre-wired boat wire for connection between cord reel and AC distribution panel this option provides a length of boat wire that is pre-terminated to the cord reel, which can then be used for connecting to the A/C distribution panel.
- Hawse Pipe for cord exit provides a watertight exit for the power cord through the bulkhead.



Stainless Steel Hawse Pipe

For more information, contact our sales engineer or your local dealer today!





740 Century Circle Conway, SC 29526 Phone: (843) 399-6146 Fax: (843) 399-5005

www.glendinningprods.com SML-CRM30-BROC_v2.0 02/10