




HoseMaster Water Coupler Hub Tightening Procedure


Step 1

Insert and snug all 5 screws (P/N 70555) evenly using star pattern (begin with screw labeled #1 and follow in order to screw #5 – see below). DO NOT torque at this point!

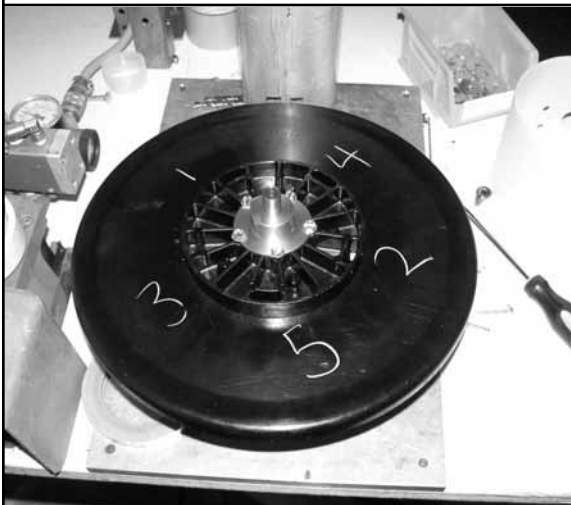

Step 2

Using same star pattern, torque all screws down in order from screw #1 thru screw #5.

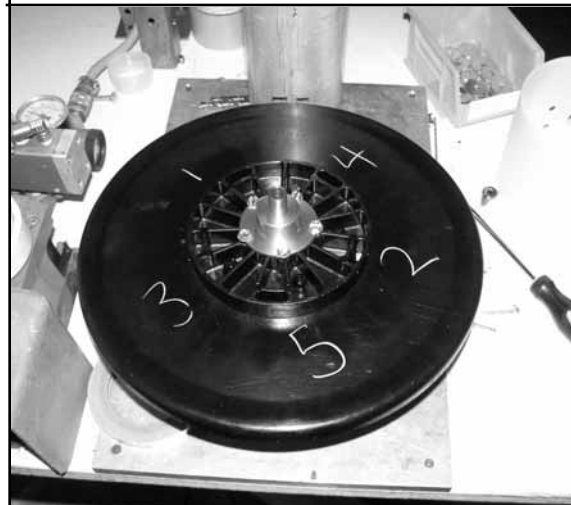

Step 3

Re-torque all 5 screws around hub in a circular motion (see photo below – begin with screw labeled #1 and follow in order to screw #5).



GLENDINNING Marine Products
740 Century Circle
Conway, SC 29526

P: (843) 399-6146
F: (843) 399-5005
www.glendinningprods.com

P/N - 51551